

INTERNATIONAL COOPERATION TREATY

From the INTERNATIONAL BUREAU

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

To:

Assistant Commissioner for Patents
United States Patent and Trademark
Office
Box PCT
Washington, D.C.20231
ETATS-UNIS D'AMERIQUE

in its capacity as elected Office

Date of mailing (day/month/year) 22 September 2000 (22.09.00)	
International application No. PCT/DK99/00719	Applicant's or agent's file reference P 98 033 WO
International filing date (day/month/year) 20 December 1999 (20.12.99)	Priority date (day/month/year) 21 December 1998 (21.12.98)
Applicant MARQVARDSEN, Ion et al	

1. The designated Office is hereby notified of its election made:

 in the demand filed with the International Preliminary Examining Authority on:

11 July 2000 (11.07.00)

 in a notice effecting later election filed with the International Bureau on:

2. The election was
 was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No.: (41-22) 740.14.35	Authorized officer A. Karkachi Telephone No.: (41-22) 338.83.38
--	--

PATENT COOPERATION TREATY

PCT

REC'D 19 APR 2001

WIPO PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Handwritten mark

Applicant's or agent's file reference P 98 033 WO	FOR FURTHER ACTION See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/DK99/00719	International filing date (day/month/year) 20/12/1999	Priority date (day/month/year) 21/12/1998
International Patent Classification (IPC) or national classification and IPC H04R1/28		
Applicant TELITAL R&D DENMARK A/S et al.		

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.



2. This REPORT consists of a total of 6 sheets, including this cover sheet.

This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of 4 sheets.

3. This report contains indications relating to the following items:

- I Basis of the report
- II Priority
- III Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV Lack of unity of invention
- V Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI Certain documents cited
- VII Certain defects in the international application
- VIII Certain observations on the international application

Date of submission of the demand 11/07/2000	Date of completion of this report 21.01.01
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Van der Peet, H Telephone No. +49 89 2399 2764 

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/DK99/00719

I. Basis of the report

1. With regard to the **elements** of the international application (*Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17)*):

Description, pages:

1-17 as originally filed

Claims, No.:

1-19 as received on 17/02/2001 with letter of 15/02/2001

Drawings, sheets:

1/7-7/7 as originally filed

2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.

These elements were available or furnished to this Authority in the following language: , which is:

- the language of a translation furnished for the purposes of the international search (under Rule 23.1(b)).
- the language of publication of the international application (under Rule 48.3(b)).
- the language of a translation furnished for the purposes of international preliminary examination (under Rule 55.2 and/or 55.3).

3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:

- contained in the international application in written form.
- filed together with the international application in computer readable form.
- furnished subsequently to this Authority in written form.
- furnished subsequently to this Authority in computer readable form.
- The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished.

4. The amendments have resulted in the cancellation of:

- the description, pages:
- the claims, Nos.:

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/DK99/00719

the drawings, sheets:

5. This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):
(Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report.)

6. Additional observations, if necessary:

III. Non-establishment of opinion with regard to novelty, inventive step and industrial applicability

1. The questions whether the claimed invention appears to be novel, to involve an inventive step (to be non-obvious), or to be industrially applicable have not been examined in respect of:
- the entire international application.
 - claims Nos. 11-19.

because:

- the said international application, or the said claims Nos. relate to the following subject matter which does not require an international preliminary examination (*specify*):
 - the description, claims or drawings (*indicate particular elements below*) or said claims Nos. 11-19 are so unclear that no meaningful opinion could be formed (*specify*):
see separate sheet
 - the claims, or said claims Nos. are so inadequately supported by the description that no meaningful opinion could be formed.
 - no international search report has been established for the said claims Nos. .
2. A meaningful international preliminary examination cannot be carried out due to the failure of the nucleotide and/or amino acid sequence listing to comply with the standard provided for in Annex C of the Administrative Instructions:
- the written form has not been furnished or does not comply with the standard.
 - the computer readable form has not been furnished or does not comply with the standard.

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N) Yes: Claims 1-10

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/DK99/00719

	No:	Claims	
Inventive step (IS)	Yes:	Claims	1-10
	No:	Claims	
Industrial applicability (IA)	Yes:	Claims	1-10
	No:	Claims	

2. Citations and explanations
see separate sheet

VII. Certain defects in the international application

The following defects in the form or contents of the international application have been noted:
see separate sheet

VIII. Certain observations on the international application

The following observations on the clarity of the claims, description, and drawings or on the question whether the claims are fully supported by the description, are made:
see separate sheet

1. As already pointed out in the previous Written Opinions the originally filed claims contain four independent claims, to wit 1, 11, 17 and 18 all pertaining to a communication device. The originally filed claims are to a large extent identically worded i.e.:

a) claim 11, page 19, line 27 to page 20, line 8,

b) claim 17, line 11 to line 20,

c) claim 18, page 21, line 24 to page 22 line 3

are identical with the wording of claim 1.

The applicants were accordingly invited for reasons of clarity and conciseness that claims 11, 17 and 18 should be made dependent **on claim 1** (Article 6, PCT). In response thereto the applicants inserted

a) in claim 11 "according to claim 1-6" (after "communication device") without deleting the passage repetitive of the characterising portion of claim 1,

b) in claim 17 "according to claim 1-6" (after "communication device") without deleting the passage repetitive of the characterising portion of claim 1, and

c) in claim 18 "according to claim 1-6" (after "communication device") without deleting the passage repetitive of the characterising portion of claim 1.

Therefore the undue proliferation of wording of the present claims is similar to the original claims and the corresponding objection is accordingly reiterated (Article 6 PCT, lack of conciseness and clarity)

The passage "according to claim 1-6" seems to imply the incorporation of the features of claims 2 to 6 into claim 11. New claim 11 thus offends the proscription of Article 34(2)b PCT.

A similar observation holds for claim 17 and claim 18.

The passage "according to claim 1-6" is unclear, since it is unclear on which combination of claims 1 to 6 claim 11 depends. A similar observation holds for claims 17, 19 and 4 to 10.

2. In order to facilitate easy reference the documents cited in the International Search Report are numbered **seriatim** (D1 to D6).

Pursuant to Rule 64.3 document D1 is **not** prior art for the purposes of Article 33(2) and (3) PCT. In pursuance of Rule 70.10 it is put on record that the date of publication of D1 is 23.6.1999, its date of filing is 30.9.1998 and it invokes the

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/DK99/00719

priority date 22.12.1997.

None of the remaining documents cited in the International Search Report discloses a communication device according to claim 1. The subject matter of claims 1 to 10 is accordingly novel and not rendered obvious by the technical teaching of the prior art.

INTERNATIONAL SEARCH REPORT

International Application No

DK 99/00719

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 H01Q1/24 H04B1/38 H04M1/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 IPC 7 H01Q H04B H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, X	EP 0 924 793 A (NORTHERN TELECOM LTD) 23 June 1999 (1999-06-23) column 2, line 20 -column 7, line 35; figures	1, 3
A	WO 95 24746 A (CETELCO (DK)) 14 September 1995 (1995-09-14) page 4, line 17 -page 7, line 4; figures 1-6	1, 4, 17
A	EP 0 833 455 A (NOKIA MOBILE PHONES LTD) 1 April 1998 (1998-04-01) page 5, line 25 -page 9, line 16; figures 1-16	1-3
	-/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

14 June 2000

Date of mailing of the international search report

20/06/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Delangue, P

INTERNATIONAL SEARCH REPORT

International Application No

DK 99/00719

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 44 31 601 A (SIEMENS AG) 10 August 1995 (1995-08-10) column 1, line 30 -column 3, line 65; figures 1,2	1,17
A	DE 44 10 995 A (SAGEM) 6 October 1994 (1994-10-06) column 2, line 43 -column 3, line 39; figures 1-5	1,17
A	DE 196 40 412 C (SIEMENS AG) 22 January 1998 (1998-01-22) column 4, line 57 -column 6, line 26; figures 1-6	1
E	FR 2 783 652 A (SAGEM) 24 March 2000 (2000-03-24) the whole document	1,5,11, 13-19

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT 99/00719

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0924793	A	23-06-1999	NONE	
WO 9524746	A	14-09-1995	AU 1892895 A	25-09-1995
			AU 693867 B	09-07-1998
			AU 1892995 A	25-09-1995
			CN 1124066 A	05-06-1996
			CN 1124067 A	05-06-1996
			WO 9524745 A	14-09-1995
			EP 0697138 A	21-02-1996
			EP 0697139 A	21-02-1996
			JP 8510621 T	05-11-1996
			JP 8510622 T	05-11-1996
			US 5952975 A	14-09-1999
			US 5886668 A	23-03-1999
EP 0833455	A	01-04-1998	US 5918189 A	29-06-1999
DE 4431601	A	10-08-1995	NONE	
DE 4410995	A	06-10-1994	FR 2703550 A	07-10-1994
DE 19640412	C	22-01-1998	WO 9815093 A	09-04-1998
FR 2783652	A	24-03-2000	EP 1001547 A	17-05-2000

CLAIMS

1. Communication device comprising a housing enclosing at least one loudspeaker (2) and at least part of at least one antenna (1) inside the housing (8), said at least one loudspeaker comprising an acoustic resonance chamber (9) and said at least one antenna comprising at least one electromagnetic resonance chamber (13),

10 characterised in that

the acoustic resonance chamber (9) is completely or partly located within the electromagnetic resonance chamber (13).

15

2. Communication device according to claim 1, characterised in that the at least one antenna (1) is a directive patch antenna.

20 3. Communication device according to claim 1 or 2, characterised in that at least one antenna (1) is a dual band antenna.

25 4. Communication device according to claims 1-3, characterised in that the at least one antenna (1) defines the walls of the acoustic resonance chamber (9) completely or partly.

30 5. Communication device according to claims 1-4, characterised in that the loudspeaker (2) is coupled with the resonance chamber by means of at least one acoustic channel.

RECEIVED BY
ANT 34 AMDT

6. Communication device according to claims 1-5, characterised in that at least one antenna (1) is a coil or loop antenna, preferably a directive coil or loop antenna.

5

7. Communication device according to claims 1-6, characterised in that the acoustic resonance chamber (9) is a pressure chamber.

10

8. Communication device according to claims 1-7, characterised in that the acoustic resonance chamber (9) has acoustic openings to the exterior.

15

9. Communication device according to claims 1-8, characterised in that the dimension of the acoustic resonance chamber (9) completely or partly located within the electromagnetic resonance chamber is 0.5 to 8 cm³.

20

10. Communication device according to claims 1-9, characterised in that the shared resonance chamber is on the inside being reinforced by reinforcement elements or walls dividing the chamber into smaller volumes.

25

11. Communication device comprising a housing enclosing at least one loudspeaker (2) and at least a part of at least one antenna (1) inside the housing (8), said at least one loudspeaker (2) comprising an acoustic resonance chamber (9) and said at least one antenna comprising at least one electromagnetic resonance chamber (13),

30

characterised in that

- the acoustic resonance chamber (9) is completely or partly located within the electromagnetic resonance chamber (13), wherein said loudspeaker (2) and said acoustic resonance chamber (9) are separated by means of at least one electromagnetic screen (11), said loudspeaker and said acoustic resonance chamber are acoustically connected through said electromagnetic screen by means of at least one acoustically coupling means (10).
- 10
12. Communication device according to claim 11, characterised in that said screen is the ground plane (11) of the antenna (1).
- 15
13. Communication device according to claim 11, characterised in that the loudspeaker (2) is coupled with the acoustic resonance chamber (9) by means of at least one acoustic channel (10) passing through said screen (11).
- 20
14. Communication device according to claim 11, characterised in that the channel consists of one or more holes (10) in said screen (11).
- 25
15. Communication device according to claim 14, characterised in that the number of holes is between 1 and 50, preferably 4 holes.
- 30
16. Communication device according to claim 15, characterised in that the diameter of the one or more holes is between 0,5 and 5 mm, preferably 2 mm.

17. Communication device comprising a housing enclosing at least one loudspeaker (2) and at least a part of at least one antenna (1) inside the housing (8), said at least one loudspeaker comprising an acoustic resonance chamber (9) and said at least one antenna comprising at least one electromagnetic resonance chamber (13),

characterised in that

10 the acoustic resonance chamber (9) is completely or partly located within the electromagnetic resonance chamber (13) and that the acoustic resonance chamber or at least the main part of the acoustic resonance chamber is located at a distance from said loudspeaker (2).

15

18. Communication device comprising a housing enclosing at least one loudspeaker (2) and at least part of at least one antenna (1) inside the housing (8), said at least one loudspeaker comprising an acoustic resonance chamber (9) and said at least one antenna comprising at least one electromagnetic resonance chamber (13),

characterised in that

25 the acoustic resonance chamber (9) is completely or partly located within the electromagnetic resonance chamber (13) and that the loudspeaker and the acoustic resonance chamber is connected by at least one acoustic coupling means (10).

30

19. Communication device according to claim 17 or 18, characterised in that the acoustic coupling means is at least one acoustic channel.

TENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference P 98 033 WO	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/DK 99/ 00719	International filing date (day/month/year) 20/12/1999	(Earliest) Priority Date (day/month/year) 21/12/1998
Applicant TELITAL R&D DENMARK A/S et al.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.

It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

contained in the international application in written form.

filed together with the international application in computer readable form.

furnished subsequently to this Authority in written form.

furnished subsequently to this Authority in computer readable form.

the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. **Certain claims were found unsearchable** (See Box I).

3. **Unity of Invention is lacking** (see Box II).

4. With regard to the **title**,

the text is approved as submitted by the applicant.

the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

the text is approved as submitted by the applicant.

the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

as suggested by the applicant.

because the applicant failed to suggest a figure.

because this figure better characterizes the invention.

5

None of the figures.




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : H01Q 1/24, H04B 1/38, H04M 1/02</p>	<p>A3</p>	<p>(11) International Publication Number: WO 00/38475 (43) International Publication Date: 29 June 2000 (29.06.00)</p>
<p>(21) International Application Number: PCT/DK99/00719 (22) International Filing Date: 20 December 1999 (20.12.99) (30) Priority Data: PA 1998 01700 21 December 1998 (21.12.98) DK (71) Applicant (for all designated States except US): TELITAL R & D DENMARK A/S [DK/DK]; Østre Allé 6, DK-9530 Støvring (DK). (72) Inventors; and (75) Inventors/Applicants (for US only): MARQVARDSEN, Ion [DK/DK]; Hadsundvej 56A, 1, DK-9000 Aalborg (DK). BJERRE, Bjarne, Hagbart [DK/DK]; Hobrovej 95, DK-9530 Støvring (DK). (74) Agent: PATENTGRUPPEN ApS; Arosgården, Åboulevarden 31, DK-8000 Århus C (DK).</p>		<p>(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p> <p>(88) Date of publication of the international search report: 8 September 2000 (08.09.00)</p>

(54) Title: A COMMUNICATION DEVICE

(57) Abstract

The invention relates to a communication device comprising a housing enclosing at least one loudspeaker and at least part of at least one antenna inside the housing. This at least one loudspeaker comprises an acoustic resonance chamber while said at least one antenna comprises at least one electromagnetic resonance chamber. The invention teaches that the acoustic resonance chamber can be located completely or partly within the electromagnetic resonance chamber.

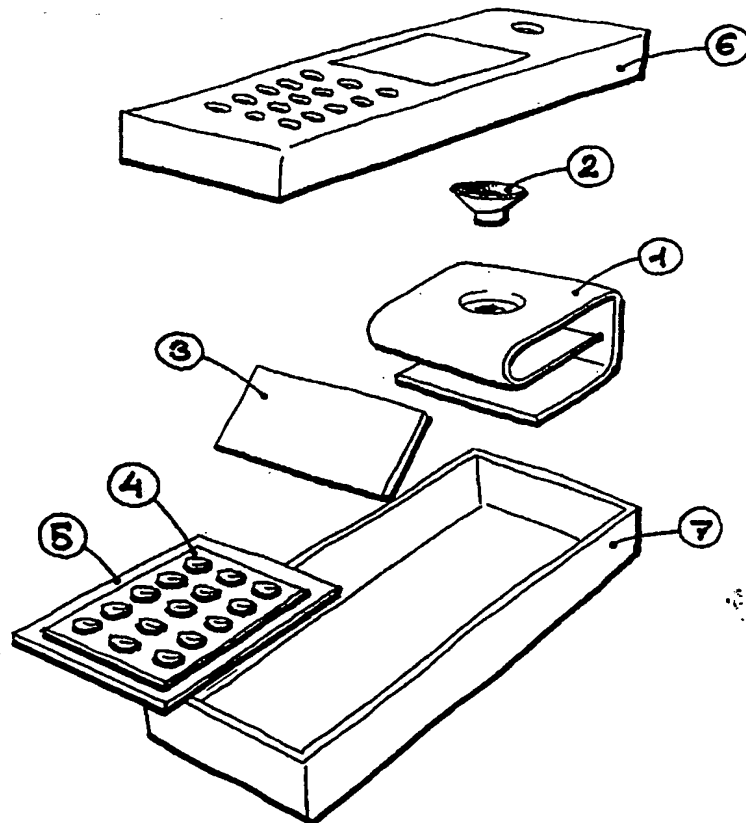

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : H04R 1/28</p>	<p>A2</p>	<p>(11) International Publication Number: WO 00/38475 (43) International Publication Date: 29 June 2000 (29.06.00)</p>
<p>(21) International Application Number: PCT/DK99/00719 (22) International Filing Date: 20 December 1999 (20.12.99) (30) Priority Data: PA 1998 01700 21 December 1998 (21.12.98) DK (71) Applicant (for all designated States except US): TELITAL R & D DENMARK A/S [DK/DK]; Østre Allé 6, DK-9530 Støvring (DK). (72) Inventors; and (75) Inventors/Applicants (for US only): MARQVARDSEN, Ion [DK/DK]; Hadsundvej 56A, 1, DK-9000 Aalborg (DK). BJERRE, Bjarne, Hagbart [DK/DK]; Hobrovej 95, DK-9530 Støvring (DK). (74) Agent: PATENTGRUPPEN ApS; Arosgården, Åboulevarden 31, DK-8000 Århus C (DK).</p>	<p>(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published Without international search report and to be republished upon receipt of that report.</p>	

(54) Title: A COMMUNICATION DEVICE

(57) Abstract

The invention relates to a communication device comprising a housing enclosing at least one loudspeaker and at least part of at least one antenna inside the housing. This at least one loudspeaker comprises an acoustic resonance chamber while said at least one antenna comprises at least one electromagnetic resonance chamber. The invention teaches that the acoustic resonance chamber can be located completely or partly within the electromagnetic resonance chamber.

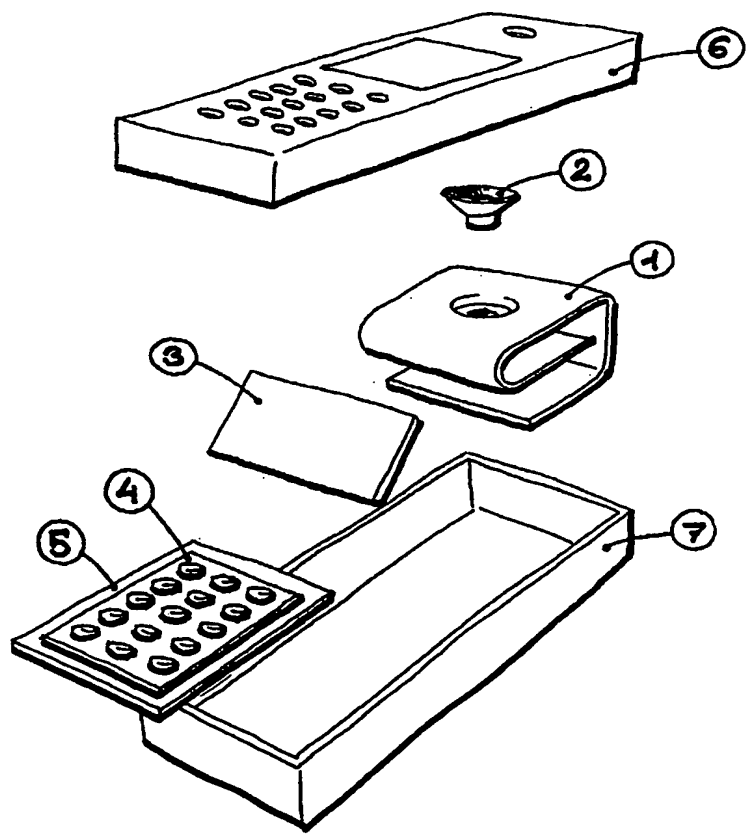

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

A communication device**Field of the invention**

5 The invention relates to a communication device comprising a housing enclosing at least one loudspeaker and at least a part of at least one antenna inside the housing, said at least one loudspeaker comprising an acoustic resonance chamber and said at least one antenna
10 comprising at least one electromagnetic resonance chamber.

Background of the invention

15 Communication devices, such as handheld cellular phones, have gained widespread acceptance over the years. One reason for this is the constant development of new generations of communication devices of smaller dimensions than the previous ones making the
20 communication device handier in use and more convenient to carry.

In the field of this invention, a conventional communication device comprises two volumes of interior
25 space used as resonance chambers where the loudspeaker uses the first volume and the antenna uses the other volume.

A problem with the conventional communication device is
30 to make it yet even smaller or at least maintain the size even though the communication device has to contain an

ever increasing amount of electronic components to be able to offer new features.

Summary of the invention

5

When, as stated in claim 1, the acoustic resonance chamber is completely or partly located within the electromagnetic resonance chamber, it is possible to manufacture considerably smaller communication devices
10 than the conventional types with separate resonance chambers for the antenna and the loudspeaker.

At the same time, volume needed for walls to encapsulate two resonance chambers can now be reduced to walls
15 surrounding the shared resonance chamber.

It should be noted that an acoustic resonance chamber according to the invention may e.g. be a closed pressure chamber or a partly closed bass reflection chamber
20 adapted to obtain desired frequency characteristics and efficiency. The main component providing this feature in a pressure chamber loudspeaker is the air encapsulated by the walls defining the chamber and the membrane. The encapsulated air will accordingly act as an elasticity,
25 defined within the art as c_m . Of course, a resonance chamber according to the invention can also comprise a bass reflection design in which especially the lower frequency of the loudspeaker system is modified by the adding of at least one opening from the internal of the
30 loudspeaker chamber to the external.

The purpose of an acoustic resonance chamber is well described within the art of loudspeakers.

It should moreover be noted that an electromagnetic resonance chamber according to the invention is defined as at least part of the volume between at least a radiant
5 part of an antenna and a ground plane or reference of said antenna. The said electromagnetic resonance volume has a specific dielectric constant and is arranged within the housing of the device.

10 It is understood that the electromagnetic resonance volume may comprise air or a combination of air and a dielectric material.

The meaning of an electromagnetic resonance chamber is
15 well described within the art of antennas.

According to the teaching of the invention, the above resonance may be shared more or less extensively as the two different resonance phenomena may be established
20 independently of each other. No interference or distortion will occur as the low frequency acoustic pressure wave resonance will be of a completely different nature than the electromagnetic resonance within the antenna resonance chamber.

25 Another important feature of the invention is that the desired electromagnetic performance of the antenna resonance chamber may be established fully or partly in air as the dielectric properties of air may fully satisfy
30 the desired dielectric properties between e.g. the radiant plane and the ground plane of a patch antenna. Moreover, the desired conditions may be obtained by a combination of a solid dielectric and a gas dielectric,

i.e. air. This possibility of designing a dielectric resonance chamber as a combination of air and solid dielectric, or completely by air, results in a significantly increased freedom when designing the device. A solid dielectric according to the invention may e.g. be different kinds of plastics known within the art.

Due to the nature of the acoustic resonance chamber, the design of the internal shape of the chamber is of very little importance.

The communication device of the invention is preferably a mobile communication device or a handheld cellular phone.

Thus, according to the invention, the electromagnetic and the acoustic resonance chambers share a certain amount of air, having both the desired acoustic and dielectric properties.

Consequently, a reduction of weight and of course material expenses is obtained as the dielectric used to fill the volume inside the antenna may now be replaced by air.

When, as stated in claim 2, at least one antenna is a directive patch antenna, it is possible to control the direction of the radio waves from the antenna.

It should be noted that a directional patch antenna requires a relatively high resonance volume, i.e. resonance volume between the radiant part of the antenna and the ground plane, in order to obtain a satisfactory bandwidth. The possibility of establishing a shared

volume between the acoustic resonance chamber and the electromagnetic resonance space of the antenna provides the possibility of obtaining a significant reduction in volume. It should be noted that even an apparently minor
5 reduction in volume of a communication device may be significant when an effective reduction in volume of e.g. 1 to 5 cm³ is obtained in a 100 cm³ mobile phone.

When, as stated in claim 3, at least one antenna is a
10 dual-band antenna, it is possible to reduce the even stricter design criteria as the resonance volume will tend to occupy even more of the volume of the device.

When, as stated in claim 4, at least one antenna
15 completely or partly defines the walls of the acoustic resonance chamber, it is possible to use the antenna for its main purpose while also letting it constitute part of the walls of the resonance chamber.

20 The antenna components such as ground plane and radiant plane may be supported by a great variety of chamber designs as the volume required for the acoustic resonance chamber will usually be significantly less than the required volume of e.g. a micro-strip antenna.

25
Of course, it should be kept in mind that the chamber defining materials, except for the active antenna planes, should have a dielectric constant being somewhat comparable with the air inside the chamber. At least, it
30 should be designed in such a manner that the overall obtained dielectric properties meet the desired requirements.

When, as stated in claim 5, the loudspeaker is coupled with the acoustic resonance chamber by at least one acoustic channel, a further advantageous embodiment of the invention has been obtained.

5

When, as stated in claim 6, at least one antenna is a coil or loop antenna, preferably a directive coil or loop antenna, a further advantageous embodiment of the invention has been obtained.

10

When, as stated in claim 7, the acoustic resonance chamber is a pressure chamber, it is possible to let the loudspeaker use the air located within the acoustic resonance volume as an elasticity, thus obtaining better control over the loudspeaker. This provides a higher quality of the voice reproduction.

15

When, as stated in claim 8, the acoustic resonance chamber has acoustic openings to the exterior of the chamber, it is possible to make a bass reflex system which has a lower resonance frequency. This means that the system has the ability to expand the frequency range downward with a higher quality of the voice reproduction. At the same time it is possible to eliminate or reduce spikes or peaks in the loudspeaker's frequency response with acoustic openings to the exterior.

20

25

When, as stated in claim 9, the dimension of the acoustic resonance chamber, which is completely or partly located within the electromagnetic resonance chamber, is 0.5 to 8 cm³, a further advantageous embodiment of the invention has been achieved.

30

According to the above-mentioned embodiment, which typically characterises a cellular phone, even minor reductions in volume are important and significant, as the designers of those articles are heavily restricted by
5 the requirement to reduce volume to an "absolute" minimum.

However, it should be noted that the obtained reduction in volume in some devices may of course be much greater
10 within the scope of the invention, if the devices are e.g. fitted with more powerful loudspeakers. In case of an acoustic resonance chamber being of greater volume, an embodiment of the invention will benefit even more from the fact that there are very few constraints, if any, on
15 the design of the resonance chamber.

When, as stated in claim 10, the shared resonance chamber on the inside is reinforced by reinforcement elements or walls dividing the chamber into smaller volumes, it is
20 possible to avoid problems with oscillations in the walls, defining the chamber by using reinforcement elements.

When, as stated in claim 11, the acoustic resonance
25 chamber is completely or partly located within the electromagnetic resonance chamber, wherein said loudspeaker and said acoustic resonance chamber are separated by means of at least one electromagnetic screen, said loudspeaker and said acoustic resonance
30 chamber are acoustically connected through said electromagnetic screen by means of at least one acoustically coupling means, a screening against the electromagnetic fields radiating in a given direction is

obtained. The direction will be from the antenna and toward the loudspeaker and the user's head. Since radiation in this direction gives no or only a weak connection to a receiving antenna due to the user being
5 between the antennas, the efficiency of the antennas will be increased with a screen.

When, as stated in claim 12, said screen is the ground plane of the antenna, it is possible to use the
10 characteristics of a directive antenna such as a directive patch antenna in an advantageous manner.

When, as stated in claim 13, the loudspeaker is coupled with the acoustic resonance chamber by means of at least
15 one acoustic channel passing through said screen, it is possible to dimension the properties, e.g. length, height, diameter or shape, of an acoustic coupling between the loudspeaker and the acoustic resonance chamber in an advantageous manner. This is due to the
20 fact that the acoustic characteristics of the acoustic channel are defined by arbitrary choices instead of the surrounding components of the acoustic coupling providing the designer of the communication device with an active tool when defining the acoustic characteristics of the
25 device.

When, as stated in claim 14, the channel consists of one or more holes in said screen, it is possible to direct the acoustic coupling to the acoustic resonance chamber
30 over the generally shortest possible distance.

When, as stated in claim 15, the number of holes is between 1 and 50, preferably 4 holes, it is possible to

maintain the electromagnetic screening effect by using more holes in the electromagnetic screen but with a smaller diameter. By using more holes, it is also possible to maintain the electromagnetic screening effect
5 by placing the holes in different patterns or no patterns at all.

At the same time, the quality of the acoustic characteristics is not decreased since the total area of
10 holes can be kept unchanged while featuring more holes placed in an acoustically advantageous manner in relation to the acoustic resonance chamber.

When, as stated in claim 16, the diameter of the one or
15 more holes are between 0,5 and 10 mm, preferably 2 mm, it is possible to obtain a further advantageous embodiment of the invention.

When, as stated in claim 18, the acoustic resonance
20 chamber is completely or partly located within the electromagnetic resonance chamber and that the loudspeaker and the acoustic resonance chamber are connected by at least one acoustic coupling means, a multiplicity of opportunities of arranging the
25 loudspeaker inside the housing of the communication device is obtained.

This facilitates a somewhat easier design process of the communication device, which is essential because of the
30 very notable restrictions in regard to the size of the communication device.

Moreover, the fact that the shape of the resonance chamber of a loudspeaker is of very little importance with respect to the desired acoustic performance has more or less been fully exploited.

5

When, as stated in claim 19, the acoustic coupling means consists of at least one acoustic channel, it is possible to define the acoustic values of acoustic coupling more precisely. This is, of course, also subject to certain limitations associated with the use of acoustic channels e.g. length, diameter and shape of the channel. These limitations are well described within the art of acoustics and more specifically in the design of acoustic channels.

15

Brief description of the drawings

The above and other objects, features and advantages of the present invention will become more apparent from the detailed description and the accompanying drawings in which:

20

Fig. 1 is a cross section of a conventional communication device with two separate resonance chambers.

25

Fig. 2 is a perspective view of a communication device according to the invention.

30

Fig. 3 is a view of a preferred embodiment of the connection between the loudspeaker and the resonance chamber.

Fig. 4 is a schematic view of the connection between the loudspeaker and the acoustic resonance chamber.

Fig. 5 is a cross view of another preferred embodiment of the connection between the loudspeaker and the acoustic resonance chamber.

Fig. 6 is a cross section of the communication device seen from above.

10

Fig. 7 is a front view of the housing without the loudspeaker in place.

Description of the invention

15

Referring to fig. 1, a conventional communication device comprises a housing 8 containing various structural elements, including the necessary elements of a cellular phone such as a display 3, a keyboard 4, a battery (not displayed in fig. 1), a microphone, an antenna 1 and a loudspeaker 2. The elements are mounted on or connected to a printed circuit board (PCB) on which other necessary electronic components are mounted.

25 The communication device also comprises two volumes used as resonance chambers where the loudspeaker uses a first volume and the antenna uses a second volume. The chambers are separated by the PCB which extends in the entire length of the housing.

30

The resonance chamber is necessary for the loudspeaker because the front side of the loudspeaker membrane has to be somewhat isolated from the backside of the membrane to

avoid acoustic short-circuiting between the sides of the membrane. The volume inside the resonance chamber determines the lowest possible frequency to be reproduced by the loudspeaker. It also determines the amount of
5 power necessary to obtain a desired sound intensity.

The resonance chamber is necessary for the antenna because it requires a dielectric volume to radiate the radio waves from the active part of the antenna and down
10 to a ground plane.

The distance between the active part of the antenna and the ground plane is at the same time a measurement of the efficiency of the antenna, meaning the greater the
15 distance the higher efficiency up to a certain limit.

Now referring to fig. 2, a communication device according to the invention is displayed. The volume used by the antenna is at same time completely or partly defined by
20 the antenna plane, which acts as walls for the chamber.

The loudspeaker is mounted in an opening in this plane of the antenna and has a direct connection with the volume defined by the antenna.
25

An antenna of the kind used in the embodiment of the invention has a relatively large volume requirement. To obtain a satisfactory performance by the antenna, the volume has to be in excess of e.g. 13 cm³. Moreover, the
30 loudspeaker requires a certain volume and preferably in excess of 4 cm³. The upper volume limit is determined by the size of the housing and is usually not in excess of

50 cm³ inside the housing which can be utilised as the antenna volume and loudspeaker resonance chamber.

The antenna 1 may preferably be a patch antenna. A dual
5 band patch antenna would be another example of an application within the scope of the invention.

However, it should be noted that according to a further
embodiment of the invention, the antenna means may
10 comprise a conventional helix antenna mounted within the housing of the communication device.

Other examples of antennas that may be arranged within
the housing of the device are coil and loop antennas.

15

It is understood that the shape and size of the resonance
chamber can be altered from the shape and size displayed
in fig. 2. The only thing that restricts the shape and
size of the resonance chamber is the housing in which it
20 is incorporated.

In fig. 3, a preferred embodiment of the invention is
displayed. To allow the loudspeaker 2 to be placed in
other positions than those which are in direct contact
25 with the resonance chamber, an acoustic coupling 10 is
inserted between the loudspeaker 2 and the acoustic
resonance chamber 9.

It is understood that the shape and size of the acoustic
30 coupling 10 and the acoustic resonance chamber 9 can be
altered from the shape and size displayed in fig. 3.

In fig. 4, schematic illustration of the invention is displayed. The loudspeaker 2 and the acoustic resonance chamber 9 are placed separately inside the housing 8 and coupled together with an acoustic coupling 10.

5

In fig. 5, a detailed embodiment of the invention is illustrated. It shows the loudspeaker 2 and the acoustic resonance chamber 9 being placed separately inside the housing 8 and coupled together with an acoustic coupling 10. The acoustic resonance chamber 9 is located inside the electromagnetic resonance chamber 13 of the antenna 1.

A ground plane 11 separates the loudspeaker 2 and the resonance chamber 9. To establish an acoustic coupling 10 between the loudspeaker and resonance chamber, one or more holes or openings are created in the ground plane 11. The diameter of the holes will normally be between 0,5 and 5 mm, preferably 2 mm, and the number of holes between 1 and 50, preferably 4.

Fig. 6 shows a cross section of the communication device seen from above. The loudspeaker, or transducer 2, is placed at a distance from the acoustic resonance chamber 9 and with the ground plane 11 acting as a screen for electromagnetic fields between the two. The ground plane 11 has a number of holes functioning as an acoustic coupling 10 between the loudspeaker 2 and the acoustic resonance chamber 9.

30

Fig. 7 shows the front of the housing 8 of the communication device. The loudspeaker, or transducer 2,

has been removed and the acoustic coupling 10 and the ground plane 11 can be seen.

5 The acoustic coupling can also be one or more channels where the sides are defined by the surrounding components or it can be one or more tubes, pipes or holes. Also it can be combination of the two.

10 The screen against electromagnetic fields can be the ground plane of the antenna but also a separate screen whose only purpose is screening. Alternatively, it can be a ground plane to be connected with other parts of the communication device.

List

1. Antenna
2. Loudspeaker
3. Display
- 5 4. Keyboard
5. Circuit board
6. Upper part of housing
7. Lower part of housing
8. Housing
- 10 9. Acoustic resonance chamber
10. Acoustic coupling means
11. Ground plane
12. Acoustic channel or part of an acoustic channel
13. Electromagnetic resonance chamber

CLAIMS

1. Communication device comprising a housing enclosing at least one loudspeaker (2) and at least part of at least one antenna (1) inside the housing (8), said at least one loudspeaker comprising an acoustic resonance chamber (9) and said at least one antenna comprising at least one electromagnetic resonance chamber (13),
- 5
- 10 characterised in that
- the acoustic resonance chamber (9) is completely or partly located within the electromagnetic resonance chamber (13).
- 15
2. Communication device according to claim 1, characterised in that the at least one antenna (1) is a directive patch antenna.
- 20
3. Communication device according to claim 1 or 2, characterised in that at least one antenna (1) is a dual band antenna.
4. Communication device according to claims 1-3, characterised in that the at least one antenna (1) defines the walls of the acoustic resonance chamber (9) completely or partly.
- 25
5. Communication device according to claims 1-4, characterised in that the loudspeaker (2) is coupled with the resonance chamber by means of at least one acoustic channel.
- 30

6. Communication device according to claims 1-5, characterised in that at least one antenna (1) is a coil or loop antenna, preferably a directive coil or loop antenna.

5

7. Communication device according to claims 1-6, characterised in that the acoustic resonance chamber (9) is a pressure chamber.

10 8. Communication device according to claims 1-7, characterised in that the acoustic resonance chamber (9) has acoustic openings to the exterior.

15 9. Communication device according to claims 1-8, characterised in that the dimension of the acoustic resonance chamber (9) completely or partly located within the electromagnetic resonance chamber is 0.5 to 8 cm³.

20 10. Communication device according to claims 1-9, characterised in that the shared resonance chamber is on the inside being reinforced by reinforcement elements or walls dividing the chamber into smaller volumes.

25 11. Communication device comprising a housing enclosing at least one loudspeaker (2) and at least a part of at least one antenna (1) inside the housing (8), said at least one loudspeaker (2) comprising an acoustic resonance chamber (9) and said at least one antenna comprising at least one electromagnetic resonance chamber
30 (13),

characterised in that

the acoustic resonance chamber (9) is completely or partly located within the electromagnetic resonance chamber (13), wherein said loudspeaker (2) and said acoustic resonance chamber (9) are separated by means of at least one electromagnetic screen (11), said loudspeaker and said acoustic resonance chamber are acoustically connected through said electromagnetic screen by means of at least one acoustically coupling means (10).

10

12. Communication device according to claim 11, characterised in that said screen is the ground plane (11) of the antenna (1).

15

13. Communication device according to claim 11, characterised in that the loudspeaker (2) is coupled with the acoustic resonance chamber (9) by means of at least one acoustic channel (10) passing through said screen (11).

20

14. Communication device according to claim 11, characterised in that the channel consists of one or more holes (10) in said screen (11).

25

15. Communication device according to claim 14, characterised in that the number of holes is between 1 and 50, preferably 4 holes.

30

16. Communication device according to claim 15, characterised in that the diameter of the one or more holes is between 0,5 and 5 mm, preferably 2 mm.

17. Communication device comprising a housing enclosing at least one loudspeaker (2) and at least a part of at least one antenna (1) inside the housing (8), said at least one loudspeaker comprising an acoustic resonance chamber (9) and said at least one antenna comprising at least one electromagnetic resonance chamber (13),

characterised in that

10 the acoustic resonance chamber (9) is completely or partly located within the electromagnetic resonance chamber (13) and that the acoustic resonance chamber or at least the main part of the acoustic resonance chamber is located at a distance from said loudspeaker (2).

15

18. Communication device comprising a housing enclosing at least one loudspeaker (2) and at least part of at least one antenna (1) inside the housing (8), said at least one loudspeaker comprising an acoustic resonance chamber (9) and said at least one antenna comprising at least one electromagnetic resonance chamber (13),

characterised in that

25 the acoustic resonance chamber (9) is completely or partly located within the electromagnetic resonance chamber (13) and that the loudspeaker and the acoustic resonance chamber is connected by at least one acoustic coupling means (10).

30

19. Communication device according to claim 17 or 18, characterised in that the acoustic coupling means is at least one acoustic channel.

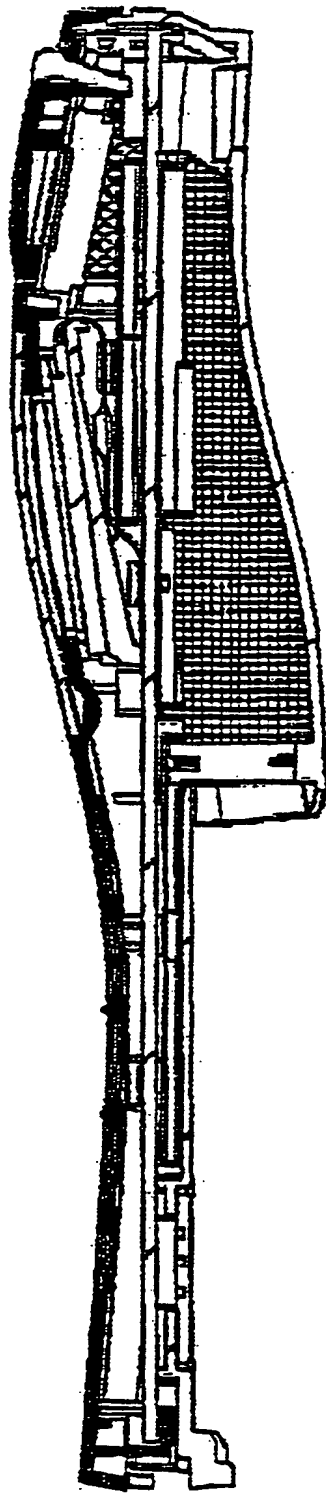


FIG. 1

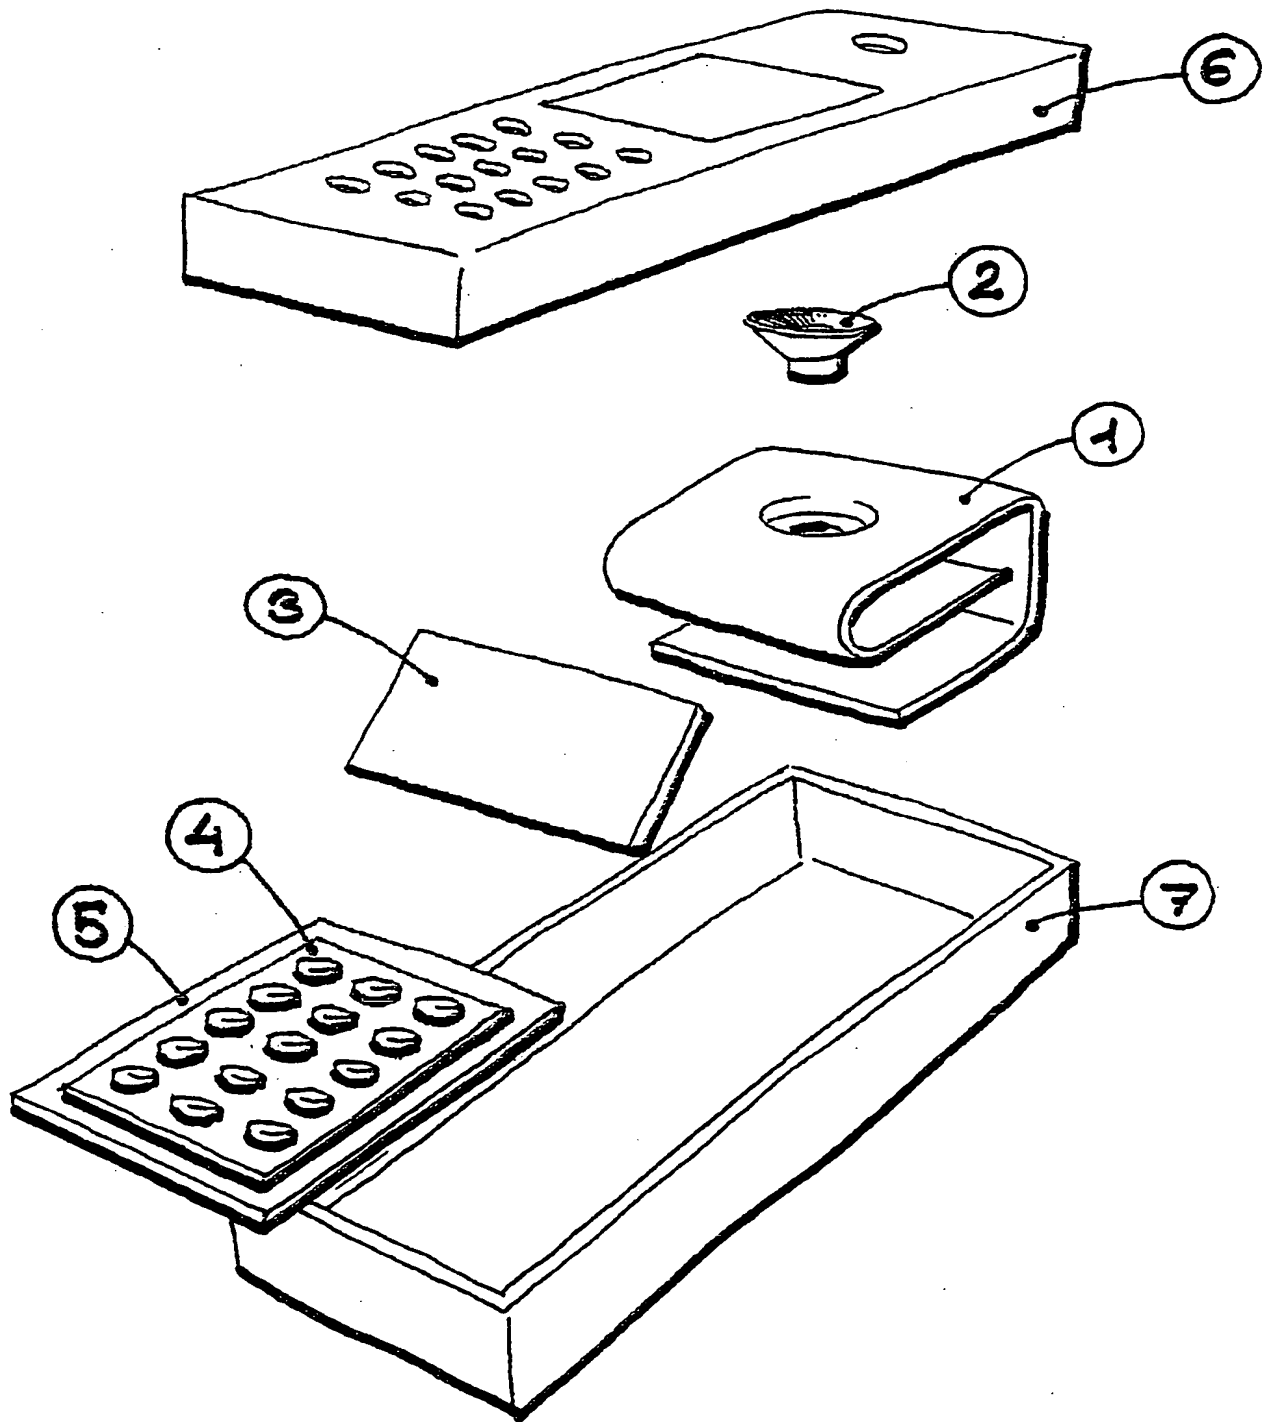


FIG. 2

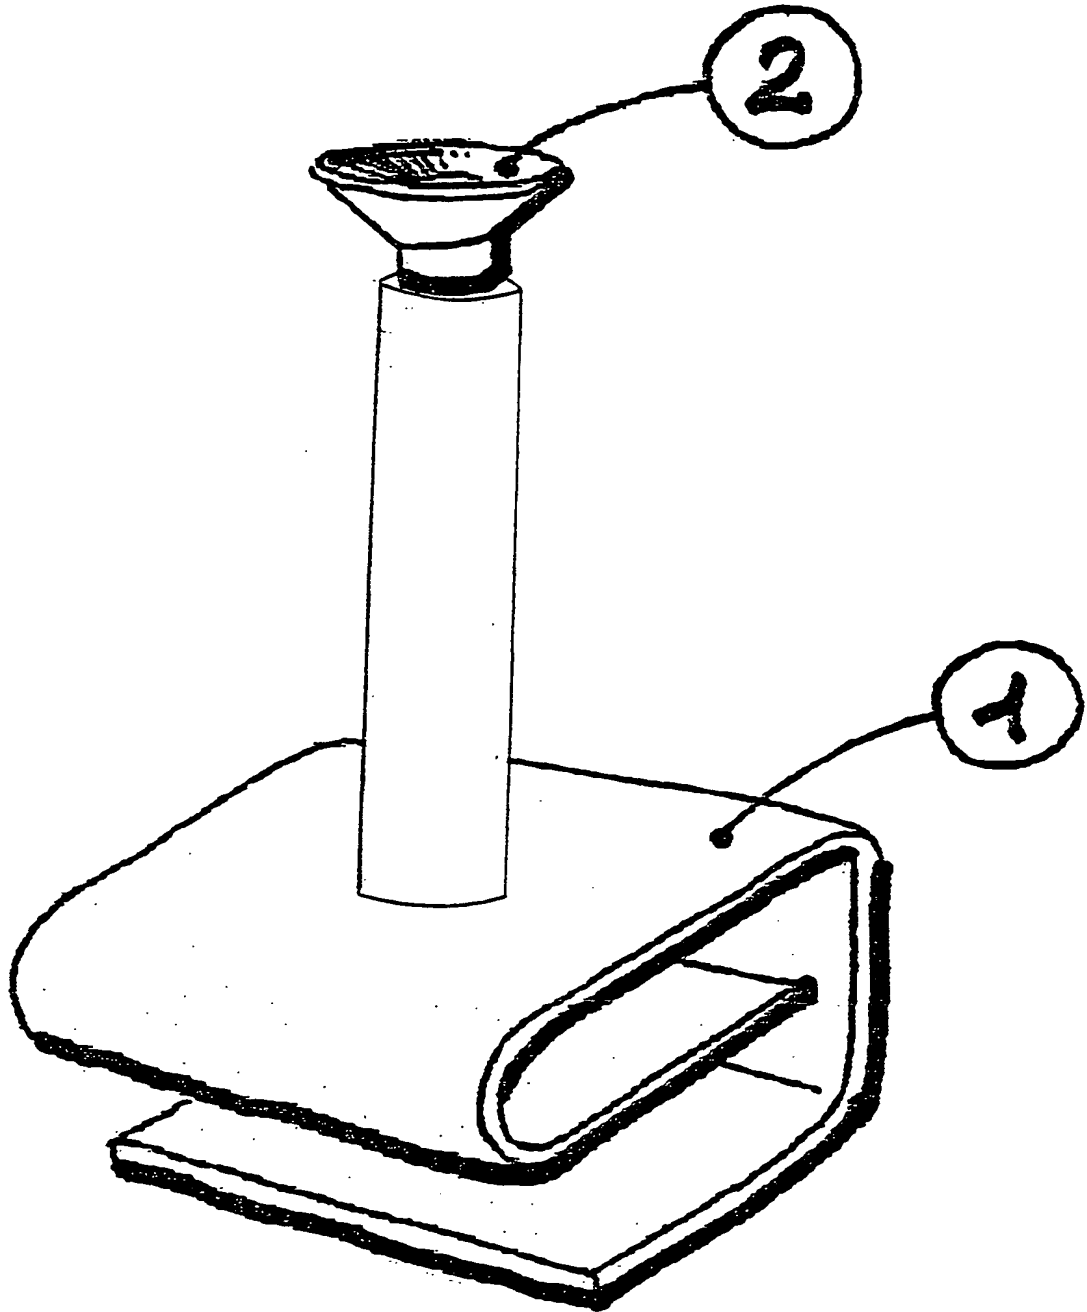


Fig. 3

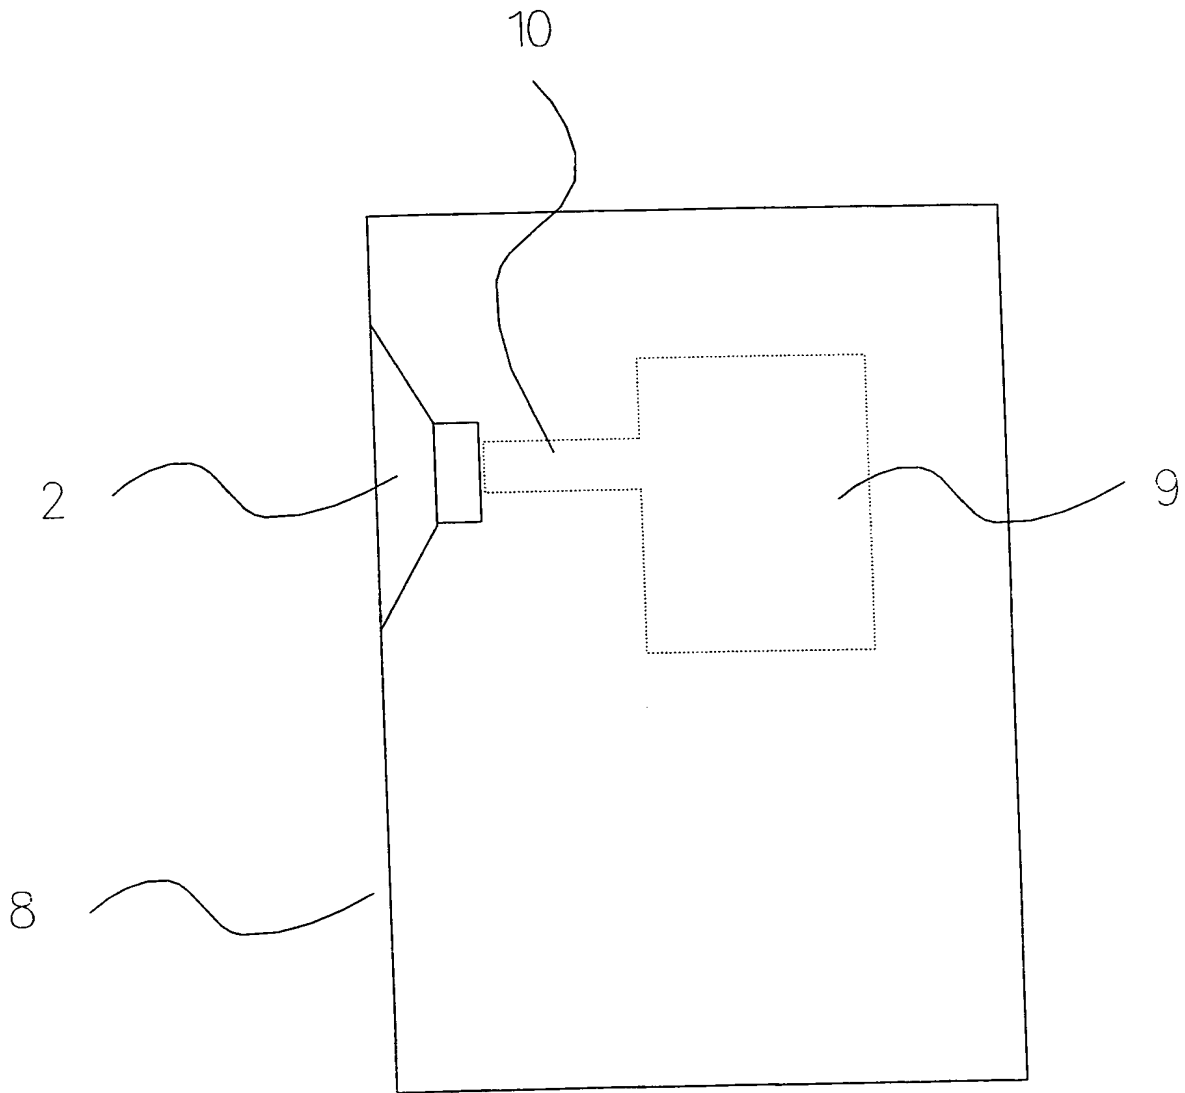


Fig. 4

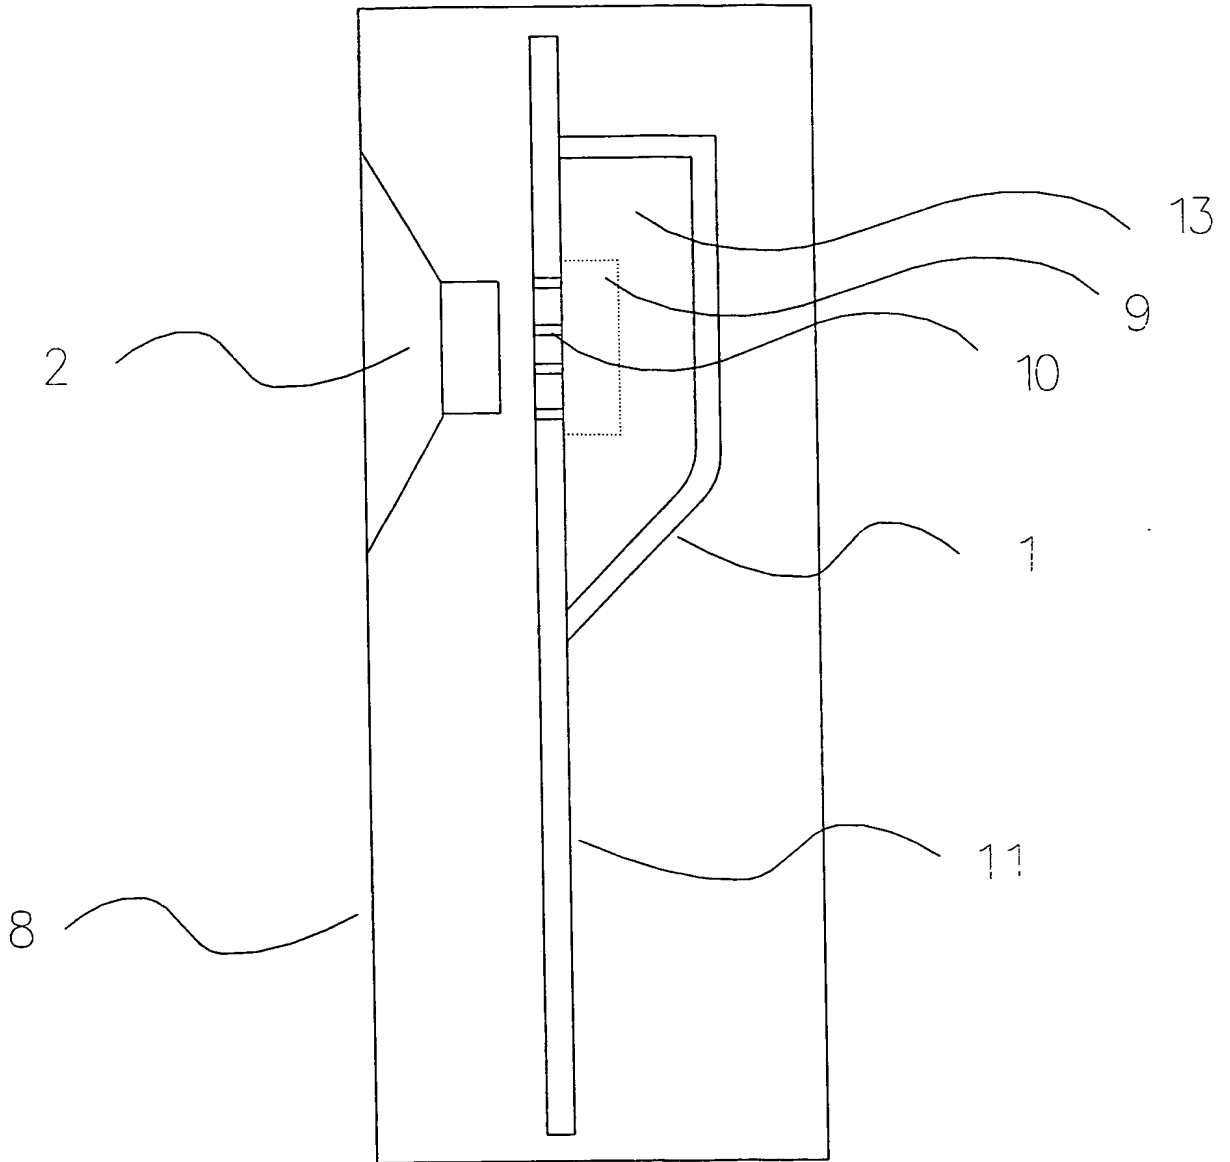


Fig. 5

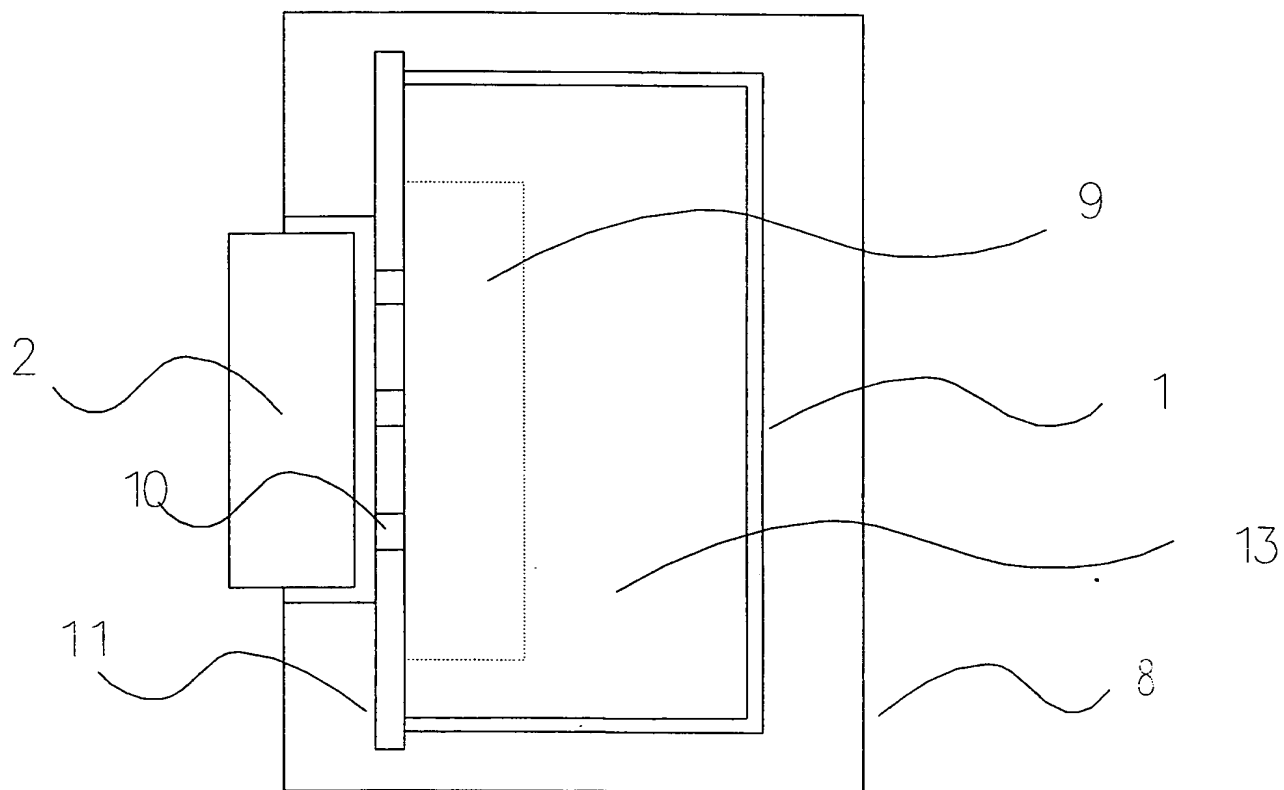


Fig. 6

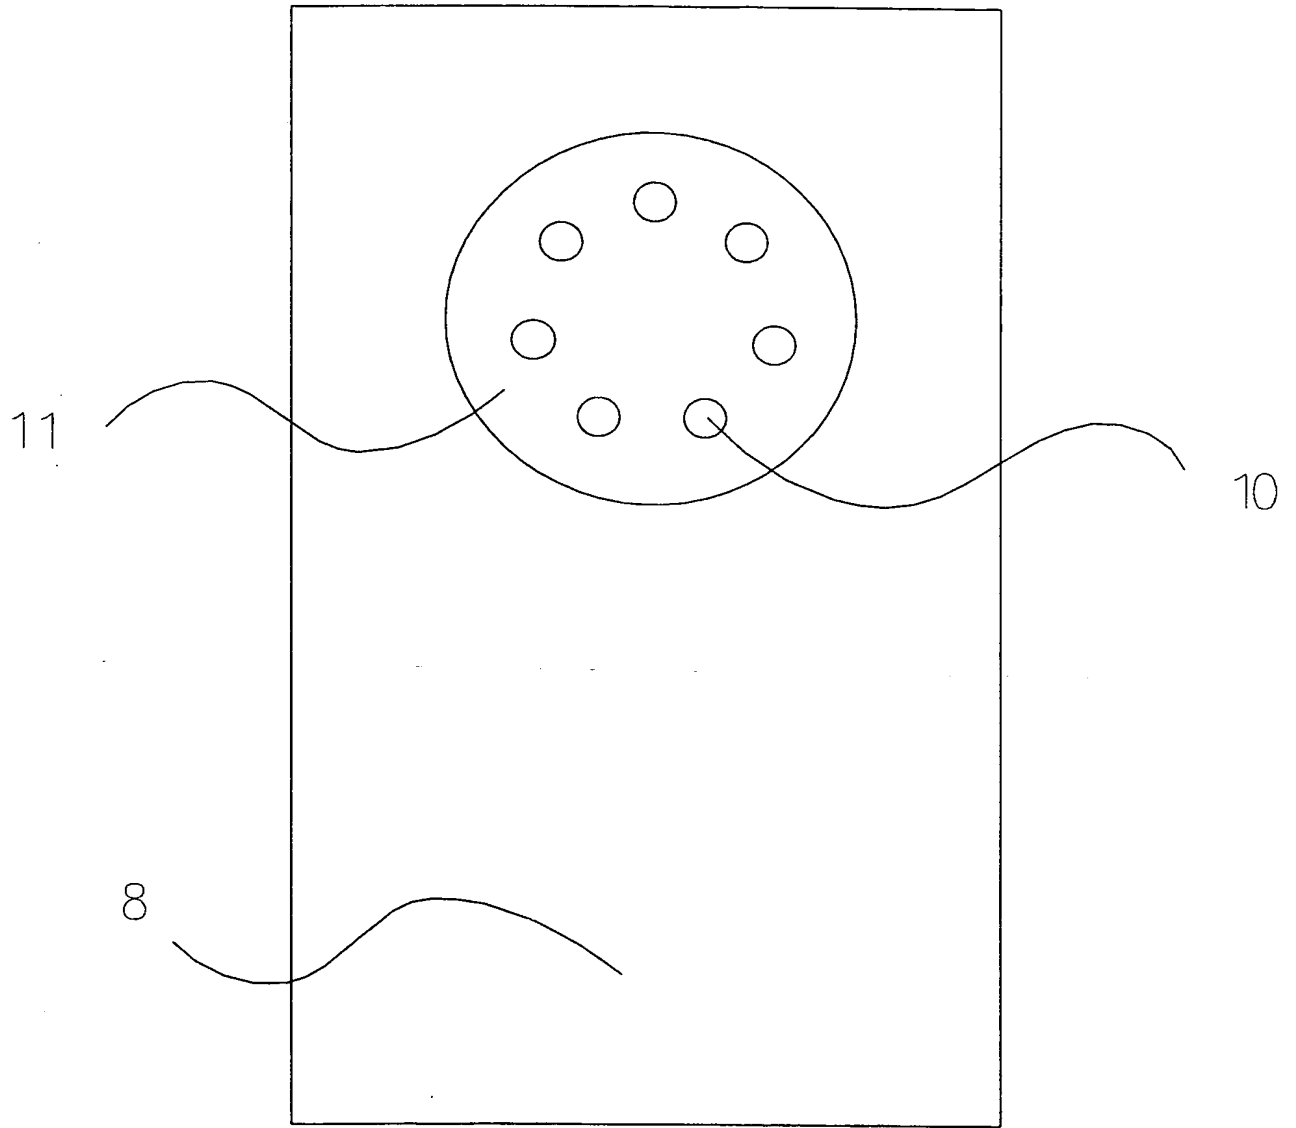


Fig. 7

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

DK 99/00719

Patent document cited in search report	A	Publication date	Patent family member(s)	Publication date
EP 0924793	A	23-06-1999	NONE	
<hr style="border-top: 1px dashed black;"/>				
WO 9524746	A	14-09-1995	AU 1892895 A	25-09-1995
			AU 693867 B	09-07-1998
			AU 1892995 A	25-09-1995
			CN 1124066 A	05-06-1996
			CN 1124067 A	05-06-1996
			WO 9524745 A	14-09-1995
			EP 0697138 A	21-02-1996
			EP 0697139 A	21-02-1996
			JP 8510621 T	05-11-1996
			JP 8510622 T	05-11-1996
			US 5952975 A	14-09-1999
			US 5886668 A	23-03-1999
<hr style="border-top: 1px dashed black;"/>				
EP 0833455	A	01-04-1998	US 5918189 A	29-06-1999
<hr style="border-top: 1px dashed black;"/>				
DE 4431601	A	10-08-1995	NONE	
<hr style="border-top: 1px dashed black;"/>				
DE 4410995	A	06-10-1994	FR 2703550 A	07-10-1994
<hr style="border-top: 1px dashed black;"/>				
DE 19640412	C	22-01-1998	WO 9815093 A	09-04-1998
<hr style="border-top: 1px dashed black;"/>				
FR 2783652	A	24-03-2000	EP 1001547 A	17-05-2000
<hr style="border-top: 1px dashed black;"/>				